

## Aluma-Pak Outdoor



## **Product Details**

- **Extruded case and solid fill provide maximum water resistance**
- The most advanced SGFI technology available
- Auto reset bypass and LED display
- 1.5" height ensures easy fit for under neon tube letter applications
- 90% lighter than equivalent magnetic
- 36" leads, sleeveless GTO15
- **UL Listed, CSA Approved**
- 60mA in our AlumaPak Case ensures dependable individual letter mercury tube performance (SS660 OX)
- The most advanced ground fault circuit protection technology available












## Aluma-Pak Outdoor

Specifications						
Part number	Secondary Voltage	Secondary mA	Primary Volt	Primary AMP	VA	Weight (lbs)
SS1235OX	2kV-12kV	35	120	2.5	300	2.2
SS935OX	2kV-9kV	35	120	2.1	250	2.2
SS660OX	2kV-6kV	60	120	1.7	200	2.2

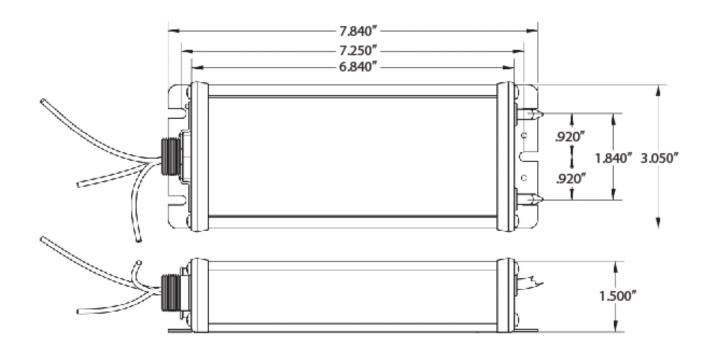

## Visit us at www.allanson.com

Phone Fax Email US 1.800.559.3659 1.615.643.1890 customerservice@ eballast.com CANADA 1.800.661.7251 1.416.752.6717 custserv@ allanson.com



